

6000UR series

Single, Dual, Triple Output DC/DC Converter



DESCRIPTIONS

The 6000UR series is a family of 50W and 60W high performance DC/DC converters specifically designed for board mount power distribution applications where space is critical, but performance and power cannot be sacrificed. Standard features include an ultra wide 4:1 input voltage range, efficiency as high as 83%, input Pi filter, and continuous short circuit protection. 18 models operate over 4:1 input ranges of 9 to 36 or 18 to 72 VDC and provide tightly regulated output combinations of 3.3, 5, 12, 15, ± 5 , ± 12 , ± 15 , 5 ± 12 and 5 ± 15 VDC.

OUTPUT CHARACTERISTICS

	Min	Typ	Max	Unit/Comments
Output Voltage Accuracy				
Single & Dual Outputs			± 1.0	% ¹
Triple Outputs - Primary			± 1.0	% ¹
- Auxiliaries			± 6.0	% ¹
Output Voltage Adjustment				
3.3V Outputs			± 100	mV
All Other Models			± 10.0	% Output Voltage
Output Voltage Balance				
Dual Outputs			± 2.0	%; Equal Output Loads
Triple Outputs			± 150	mV; Equal Output Loads
Line Regulation - 3.3V Outputs			100	mV ²
Single and Dual Outputs			± 1.0	% ²
Triple Outputs - Primary			± 1.0	% ²
- Auxiliaries			± 6.0	% ²
Load Regulation - 3.3V Outputs			100	mV ³
Single Outputs			± 1.0	% ³
Dual Outputs			± 1.0	% ³ ; Equal Loads
Triple Outputs - Primary			± 1.0	% ⁴
- Auxiliaries			± 2.0	% ³ ; Equal Loads
Ripple/Noise				mV; p-p ⁵
3.3V and 5V Outputs			100	mV; p-p ⁵
12V and 15V Outputs			1	%; p-p ⁵
Triple Outputs - Primary			125	mV p-p ⁵
Short Circuit Protection				Continuous, Automatic Recovery
Transient Recovery Time		250		μ S, to within 1% error band for 50% load step, 50% load to FL
Temperature Coefficient			± 0.02	% per °C
Over Voltage Protection				See Model Selection Guide

FEATURES

- Efficiency to 83%
- Wide 4:1 Input Voltage Range
- Input Pi Filter
- Continuous Circuit Protection
- Wide -30°C to +75°C Operating Temperature Range
- Minimum 1400 VDC Input/Output Isolation
- >600,000 Hours MTBF

INPUT CHARACTERISTICS

	Min	Typ	Max	Unit/Comments
Input Voltage Range				
24 VDC Input Models	9	24	36	VDC
48 VDC Input Models	18	24	72	VDC
Input Under Voltage Shutdown		8.5		VDC
Over Voltage Shutdown				
24 VDC Input Models		42		VDC
48 VDC Input Models		74		VDC
Input Fuse Requirement				
24 VDC Input Models		10		A; Slow Blow Type
48 VDC Input Models		6		A; Slow Blow Type
Reflected Ripple Current				See Model Selection Guide
Reverse Polarity Input Current			12	Amp
Input Filter				Pi Filter

GENERAL CHARACTERISTICS

	Min	Typ	Max	Unit/Comments
Switching Frequency		125		kHz
Isolation Voltage		1000		VDC, 1 minute
Isolation Resistance		1000		Mohm, 500VDC
MTBF (MIL-HBK-217F)		600		Thousand Hours, +25°C, Ground Benign

¹ = Output voltage at nominal line & FL


² = % Output voltage measured from min. input line to maximum

³ = Output voltage measured from FL to 25% Load

⁴ = Output voltage measured from FL to no load

⁵ = Nom. Line @ FL, 20 Mhz B.W. using 1 μ f bypass capacitor

How To ORDER

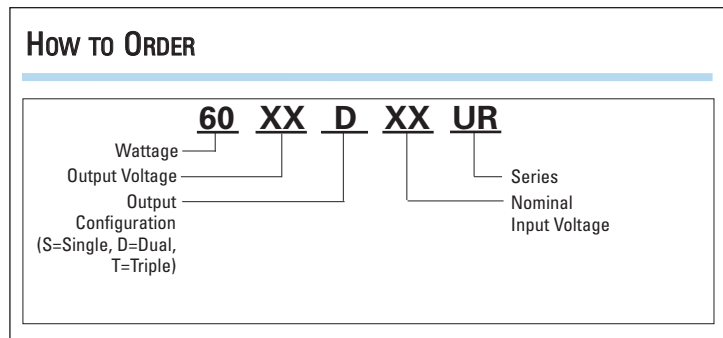

MODEL SELECTION CHART

Model	Nominal Input Voltage (VDC)	Output Voltage (VDC)	Full Load Output Current (mA)	No Load Input Current (mA)	Full Load Input Current (mA)	Reflected Ripple Current (mA)	Output Over Voltage (VDC)	Efficiency @ FL (%)
6003S24UR	24	3.3	15000	40	2610	300	5.8	79
6005S24UR	24	5	10000	40	2670	240	6.8	78
6012S24UR	24	12	4166	40	2610	240	16.0	79
6015S24UR	24	15	3333	40	2610	240	18.0	79
6005D24UR	24	±5	±5000	40	2540	260	±6.8	80
6012D24UR	24	±12	±2000	40	2600	260	±16.0	77
6015D24UR	24	±15	±1660	40	2670	260	±18.0	77
6003S48UR	48	3.3	16580	40	1420	300	5.8	80
6005S48UR	48	5	10000	40	1360	240	6.8	76
6012S48UR	48	12	5000	40	1580	240	16.0	79
6015S48UR	48	15	4280	40	1670	240	18.0	80
6005D48UR	48	±5	±6250	40	1540	240	±6.8	83
6012D48UR	48	±12	±2500	40	1580	150	±16.0	79
6015D48UR	48	±15	±2000	40	1550	150	±18.0	80
6005/12T24UR	24	5, ±12	5000, ±1040	40	2600	240	6.8, ±15.0	83
6005/15T24UR	24	5, ±15	5000, ± 833	40	2430	240	6.8, ±18.0	83
6005/12T48UR	48	5, ±12	5000, ±1040	40	1200	240	6.8, ±15.0	84
6005/15T48UR	48	5, ±15	5000, ±1000	40	1400	240	6.8, ±18.0	85